Precision Micropower Single-Supply Operational Amplifiers

OP777/OP727/OP747

FEATURES
Low Offset Voltage: 100 μV Max
Low Input Bias Current: 10 nA Max
Single-Supply Operation: 2.7 V to 30 V
Dual-Supply Operation: ±1.35 V to ±15 V
Low Supply Current: 300 μA/Amp Max
Unity Gain Stable
No Phase Reversal

APPLICATIONS
Current Sensing (Shunt)
Line or Battery-Powered Instrumentation
Remote Sensors
Precision Filters
OP727 SOIC Pin-Compatible with LT1013

GENERAL DESCRIPTION

The OP777 , OP727 , and OP747 are precision single , dual, and quad rail-to-rail output single- supply amplifiers featuring micropower operation and rail-to-rail output ranges. These amplifier s provide improved performance over the industry -standard OP07 with ±15 V supplies , and offer the further advantage of true single -supply operation down to 2.7 V , and smaller package options than any other high-voltage precision bipolar amplifier. Outputs are stable with capacitive loads of over 500 pF. Supply current is less than 300 μA per amplifier at 5 V. 500 Ω series resistors protect the inputs, allowing input signal levels several volts above the positive supply without phase reversal.

Applications for these amplifiers include both line-powered and portable instrumentation, remote sensor signal conditioning, and precision filters.

The OP777, OP727, and OP747 are specified over the extended industrial (–40°C to +85°C) temperature range. The OP777, single, is available in 8-lead MSOP and 8-lead SOIC packages. The OP747, quad, is available in 14-lead TSSOP and narrow 14-lead SO packages. Surface-mount devices in TSSOP and MSOP packages are available in tape and reel only.

The OP727, dual, is available in 8-lead TSSOP and 8-lead SOIC packages. The OP727 8-lead SOIC pin configuration differs from the standard 8-lead operational amplifier pinout.

FUNCTIONAL BLOCK DIAGRAMS

8-Lead MSOP (RM-8)



NC = NO CONNECT

8-Lead SOIC (R-8)



NC = NO CONNECT

8-Lead TSSOP (RU-8)



14-Lead SOIC (R-14)



14-Lead TSSOP (RU-14)



8-Lead SOIC (R-8)



NOTE: THIS PIN CONFIGURATION DIFFERS FROM THE STANDARD 8-LEAD OPERATIONAL AMPLIFIER PINOUT.

www.DZTIC.com/ADI

REV. C

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
Tel: 781/329-4700 www.analog.com
Fax: 781/326-8703
© Analog Devices, Inc., 2001

OP777/OP727/OP747–SPECIFICATIONS

ELECTRICAL CHARACTERISTICS (@ V_S = 5.0 V, V_{CM} = 2.5 V, T_A = 25°C unless otherwise noted.)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
INPUT CHARACTERISTICS						
Offset Voltage OP777	V_{OS}	+25°C < T_A < +85°C		20	100	µV
		–40°C < T_A < +85°C		50	200	µV
Offset Voltage OP727/OP747		+25°C < T_A < +85°C		30	160	µV
		–40°C < T_A < +85°C		60	300	µV
Input Bias Current	I_B	–40°C < T_A < +85°C		5.5	11	nA
Input Offset Current	I_{OS}	–40°C < T_A < +85°C		0.1	2	nA
Input Voltage Range			0		4	V
Common-Mode Rejection Ratio	CMRR	V_{CM} = 0 V to 4 V	104	110		dB
Large Signal Voltage Gain	A_{VO}	R_L = 10 kΩ, V_O = 0.5 V to 4.5 V	300	500		V/mV
Offset Voltage Drift OP777	$\Delta V_{OS}/\Delta T$	–40°C < T_A < +85°C		0.3	1.3	µV/°C
Offset Voltage Drift OP727/OP747	$\Delta V_{OS}/\Delta T$	–40°C < T_A < +85°C		0.4	1.5	µV/°C
OUTPUT CHARACTERISTICS						
Output Voltage High	V_{OH}	I_L = 1 mA, –40 °C to +85 °C	4.88	4.91		V
Output Voltage Low	V_{OL}	I_L = 1 mA, –40 °C to +85 °C		126	140	mV
Output Circuit	I_{OUT}	$V_{DROPOUT}$ < 1 V		±10		mA
POWER SUPPLY						
Power Supply Rejection Ratio	PSRR	V_S = 3 V to 30 V	120	130		dB
Supply Current/Amplifier OP777	I_{SY}	V_O = 0 V		220	270	µA
		–40°C < T_A < +85°C		270	320	µA
Supply Current/Amplifier OP727/OP747		V_O = 0 V		235	290	µA
		–40°C < T_A < +85°C		290	350	µA
DYNAMIC PERFORMANCE						
Slew Rate	SR	R_L = 2 kΩ		0.2		V/µs
Gain Bandwidth Product	GBP			0.7		MHz
NOISE PERFORMANCE						
Voltage Noise	e_np-p	0.1 Hz to 10 Hz		0.4		µV p-p
Voltage Noise Density	e_n	f = 1 kHz		15		nV/√Hz
Current Noise Density	i_n	f = 1 kHz		0.13		pA/√Hz

www.BDTIC.com/ADI

NOTES

Typical specifications: >50% of units perform equal to or better than the "typical" value.

Specifications subject to change without notice.

ELECTRICAL CHARACTERISTICS (@ ±15 V, V_{CM} = 0 V, T_A = 25°C unless otherwise noted.)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
INPUT CHARACTERISTICS						
Offset Voltage OP777	V_{OS}	+25 °C < T_A < +85 °C		30	100	µV
		–40 °C < T_A < +85 °C		50	200	µV
Offset Voltage OP727/OP747	V_{OS}	+25 °C < T_A < +85 °C		30	160	µV
		–40 °C < T_A < +85 °C		50	300	µV
Input Bias Current	I_B	–40 °C < T_A < +85 °C		5	10	nA
Input Offset Current	I_{OS}	–40 °C < T_A < +85 °C		0.1	2	nA
Input Voltage Range			–15		+14	V
Common-Mode Rejection Ratio	CMRR	V_{CM} = –15 V to +14 V	110	120		dB
Large Signal Voltage Gain	A_{VO}	R_L = 10 kΩ, V_O = –14.5 V to +14.5 V	1,000	2,500		V/mV
Offset Voltage Drift OP777	$\Delta V_{OS}/\Delta T$	–40 °C < T_A < +85 °C		0.3	1.3	µV/°C
Offset Voltage Drift OP727/OP747	$\Delta V_{OS}/\Delta T$	–40 °C < T_A < +85 °C		0.4	1.5	µV/°C
OUTPUT CHARACTERISTICS						
Output Voltage High	V_{OH}	I_L = 1 mA, –40 °C to +85 °C	+14.9	+14.94		V
Output Voltage Low	V_{OL}	I_L = 1 mA, –40 °C to +85 °C		–14.94	–14.9	V
Output Circuit	I_{OUT}			±30		mA
POWER SUPPLY						
Power Supply Rejection Ratio	PSRR	V_S = ±1.5 V to ±15 V	120	130		dB
Supply Current/Amplifier OP777	I_{SY}	V_O = 0 V		300	350	µA
		–40 °C < T_A < +85 °C		350	400	µA
Supply Current/Amplifier OP727/747		V_O = 0 V		320	375	µA
		–40 °C < T_A < +85 °C		375	450	µA
DYNAMIC PERFORMANCE						
Slew Rate	SR	R_L = 2 kΩ		0.2		V/µs
Gain Bandwidth Product	GBP			0.7		MHz
NOISE PERFORMANCE						
Voltage Noise	e_np-p	0.1 Hz to 10 Hz		0.4		µV p-p
Voltage Noise Density	e_n	f = 1 kHz		15		nV/√Hz
Current Noise Density	i_n	f = 1 kHz		0.13		pA/√Hz

www.BDTIC.com/ADI

Specifications subject to change without notice.

ABSOLUTE MAXIMUM RATINGS[1, 2]

Supply Voltage . . . . . 36 V
Input Voltage . . . . . $-V_S - 5$ V to $+V_S + 5$ V
Differential Input Voltage . . . . . ± Supply Voltage
Output Short-Circuit Duration to GND . . . . . Indefinite
Storage Temperature Range
RM, R, RU Packages . . . . . –65°C to +150°C
Operating Temperature Range
OP777/OP727/OP747 . . . . . –40°C to +85°C
Junction Temperature Range
RM, R, RU Packages . . . . . –65°C to +150°C
Lead Temperature Range (Soldering, 60 sec) . . . . . 300°C
Electrostatic Discharge (Human Body Model) . . . . 2000 V max

Package Type	θ_{JA}[3]	θ_{JC}	Unit
8-Lead MSOP (RM)	190	44	°C/W
8-Lead SOIC (R)	158	43	°C/W
8-Lead TSSOP (RU)	240	43	°C/W
14-Lead SOIC (R)	120	36	°C/W
14-Lead TSSOP (RU)	180	35	°C/W

NOTES
[1]Absolute maximum ratings apply at 25°C, unless otherwise noted.
[2]Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those listed in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.
[3]θ_{JA} is specified for worst-case conditions, i.e., θ_{JA} is specified for device soldered in circuit board for surface-mount packages.

ORDERING GUIDE

Model	Temperature Range	Package Description	Package Option	Branding Information
OP777ARM	–40°C to +85°C	8-Lead MSOP	RM-8	A1A
OP777AR	–40°C to +85°C	8-Lead SOIC	SO-8	
OP727ARU	–40°C to +85°C	8-Lead TSSOP	RU-8	
OP727AR	–40°C to +85°C	8-Lead SOIC	SO-8	
OP747AR	–40°C to +85°C	14-Lead SOIC	R-14	
OP747ARU	–40°C to +85°C	14-Lead TSSOP	RU-14	

www.BDTIC.com/ADI

CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although the OP777/OP727/OP747 features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high-energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.

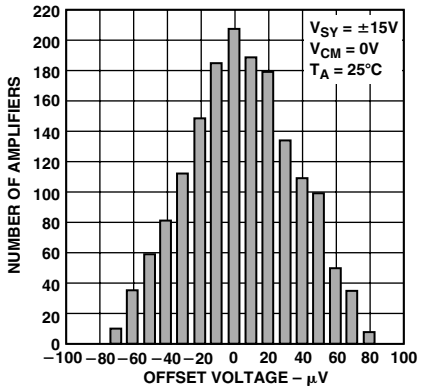

TPC 1. OP777 Input Offset Voltage Distribution

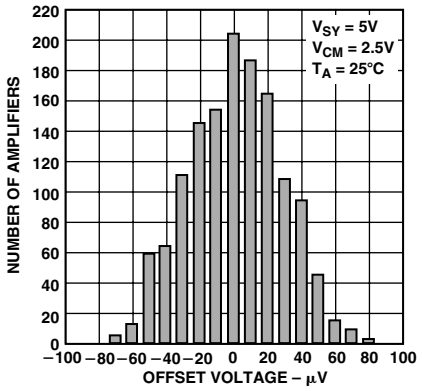

TPC 2. OP777 Input Offset Voltage Distribution

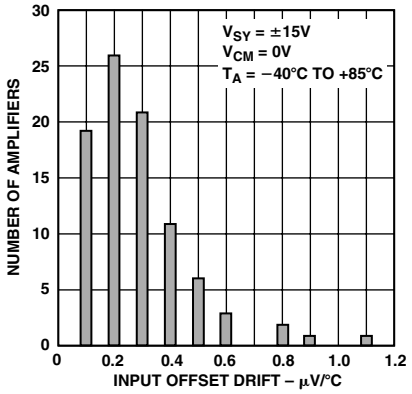

TPC 3. OP777 Input Offset Voltage Drift Distribution

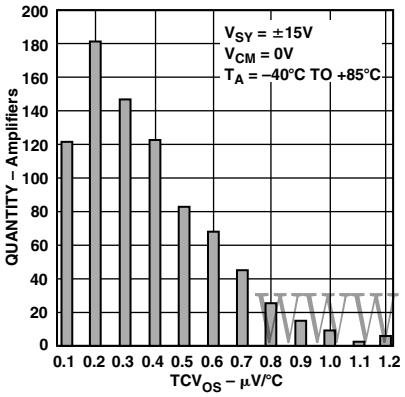

TPC 4. OP727/OP747 Input Offset Voltage Drift (TCV_{OS} Distribution)

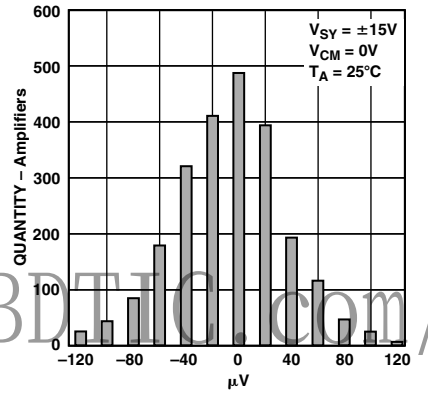

TPC 5. OP747 Input Offset Voltage Distribution

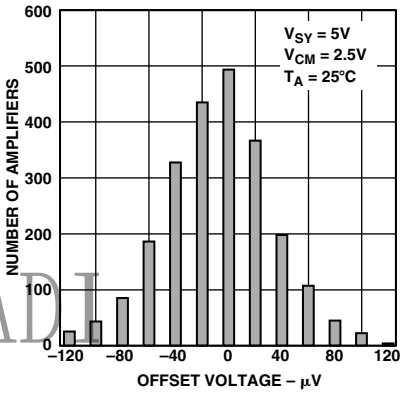

TPC 6. OP747 Input Offset Voltage Distribution

www.BDTIC.com/ADI

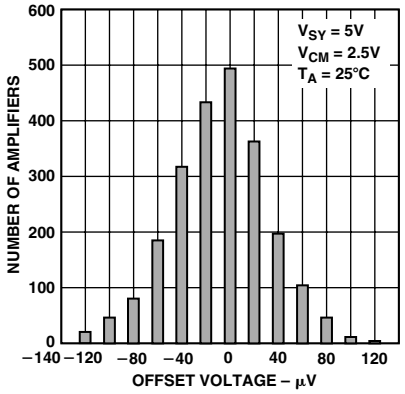

TPC 7. OP727 Input Offset Voltage Distribution

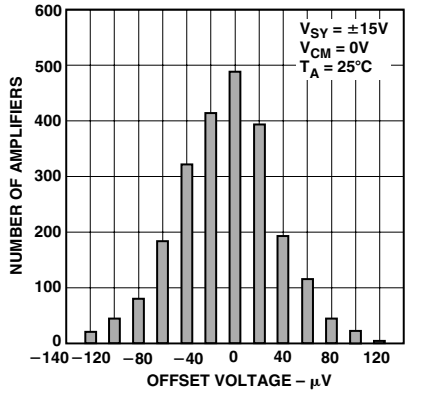

TPC 8. OP727 Input Offset Voltage Distribution

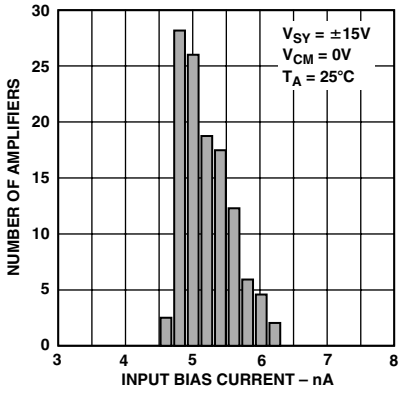

TPC 9. Input Bias Current Distribution

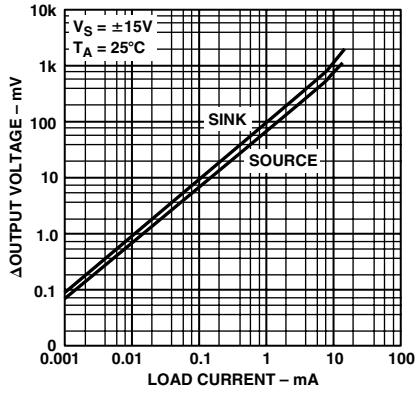

TPC 10. Output Voltage to Supply Rail vs. Load Current

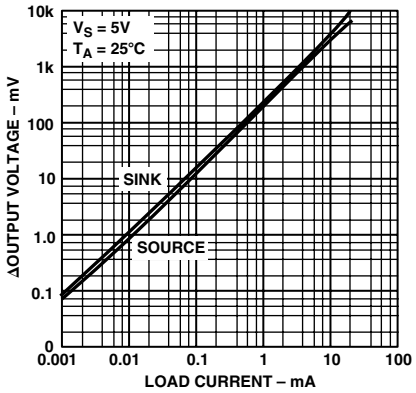

TPC 11. Output Voltage to Supply Rail vs. Load Current

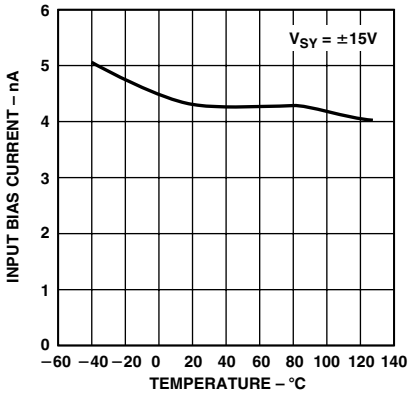

TPC 12. Input Bias Current vs. Temperature

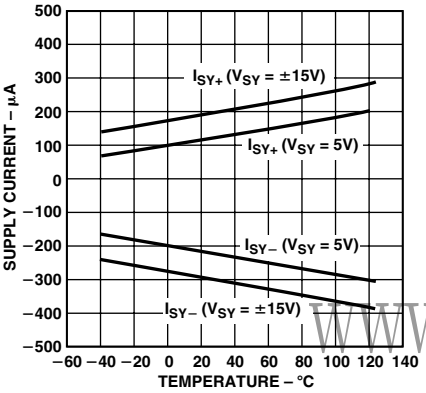

TPC 13. Supply Current vs. Temperature

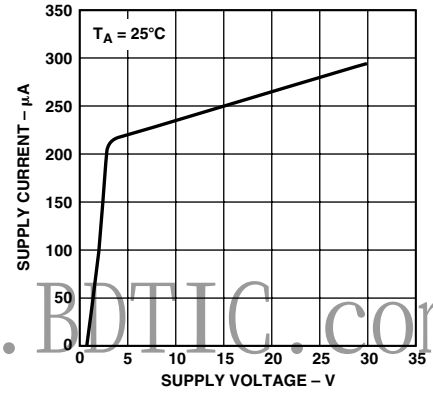

TPC 14. Supply Current vs. Supply Voltage

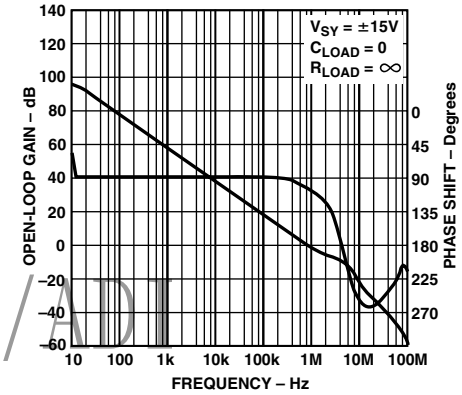

TPC 15. Open Loop Gain and Phase Shift vs. Frequency

www.BDTIC.com/ADI

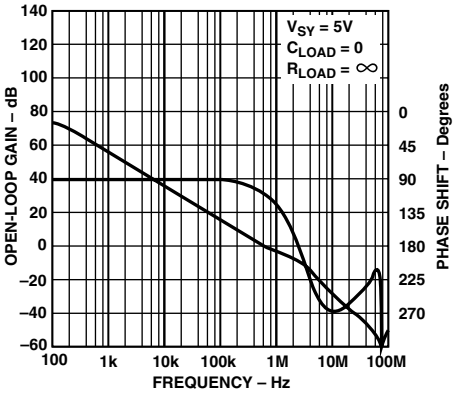

TPC 16. Open Loop Gain and Phase Shift vs. Frequency

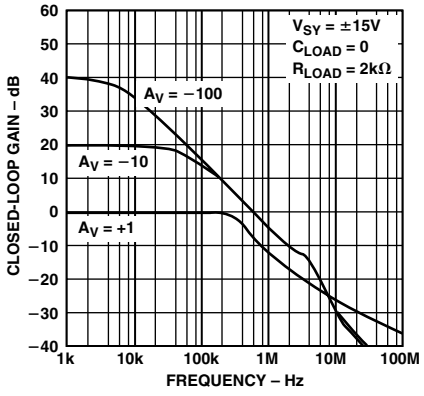

TPC 17. Closed Loop Gain vs. Frequency

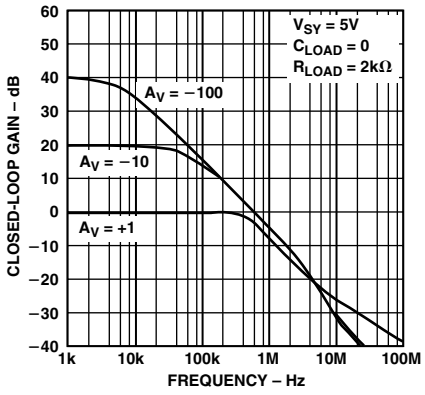

TPC 18. Closed Loop Gain vs. Frequency

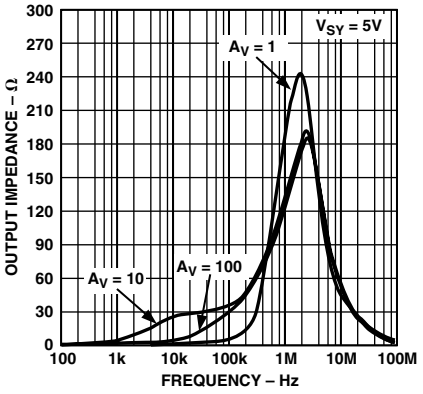

TPC 19. Output Impedance vs. Frequency

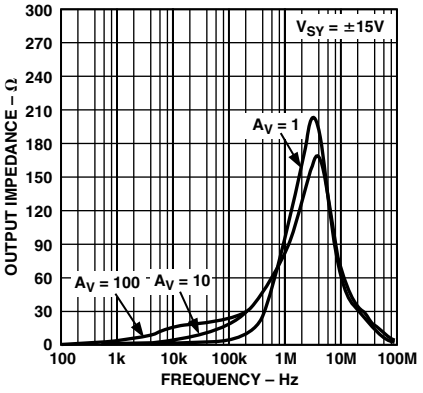

TPC 20. Output Impedance vs. Frequency

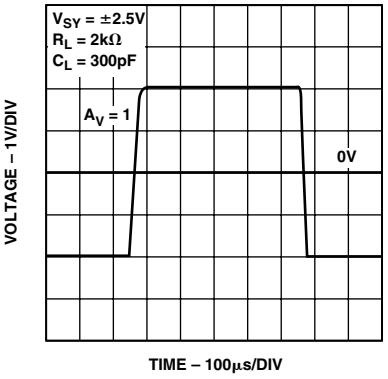

TPC 21. Large Signal Transient Response

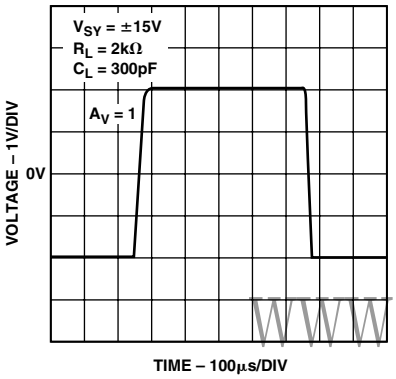

TPC 22. Large Signal Transient Response

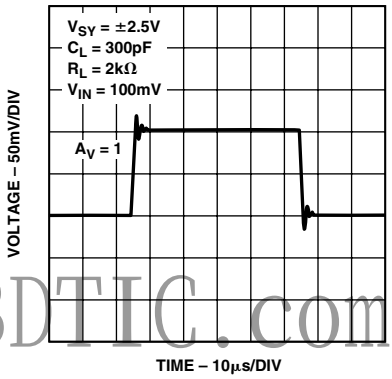

TPC 23. Small Signal Transient Response

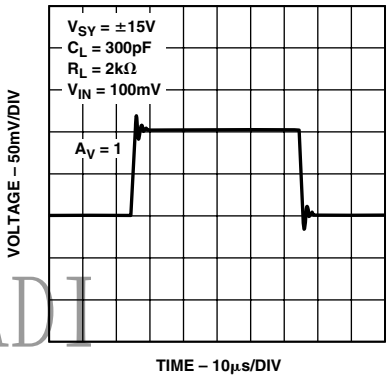

TPC 24. Small Signal Transient Response

www.BDTIC.com/ADI

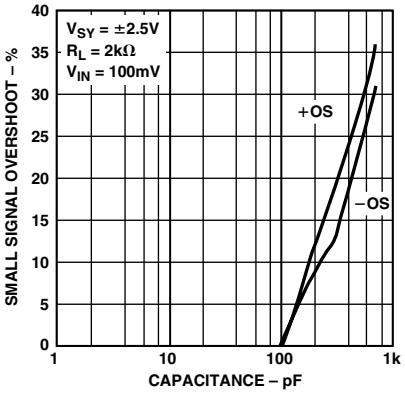

TPC 25. Small Signal Overshoot vs. Load Capacitance

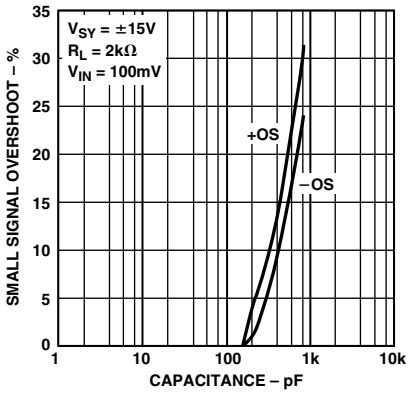

TPC 26. Small Signal Overshoot vs. Load Capacitance

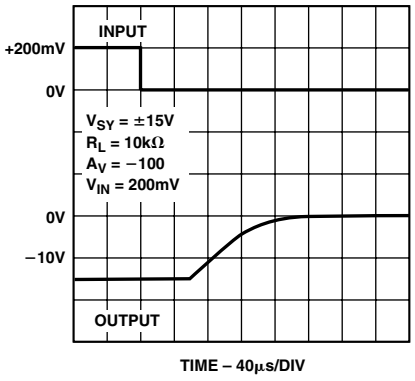

TPC 27. Negative Overvoltage Recovery

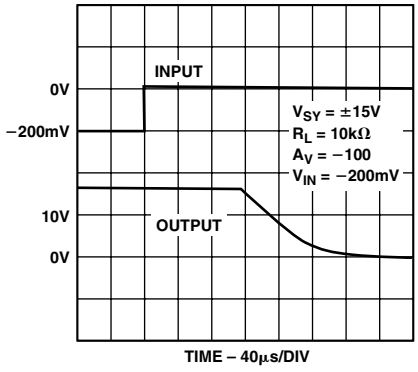

TPC 28. Positive Overvoltage Recovery

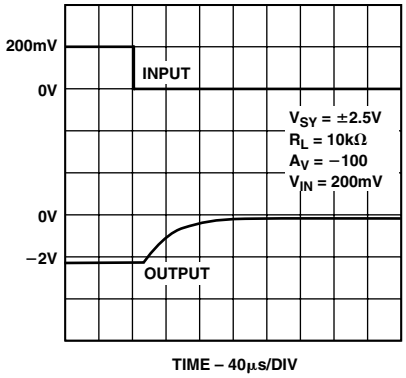

TPC 29. Negative Overvoltage Recovery

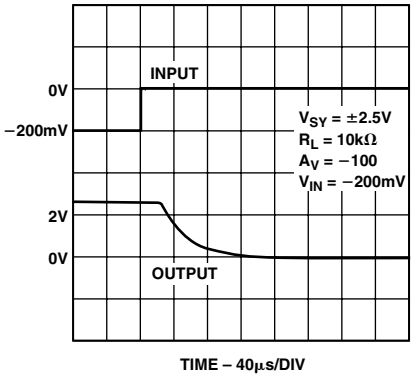

TPC 30. Positive Overvoltage Recovery

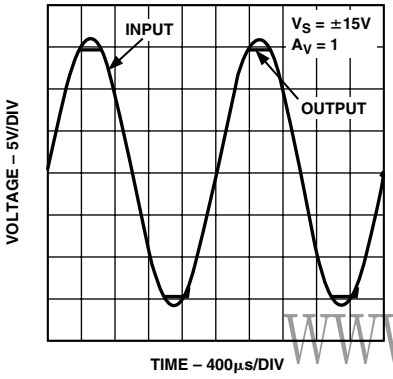

TPC 31. No Phase Reversal

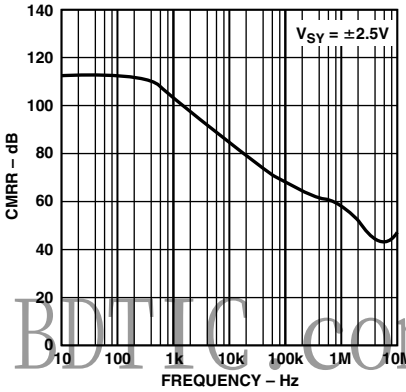

TPC 32. CMRR vs. Frequency

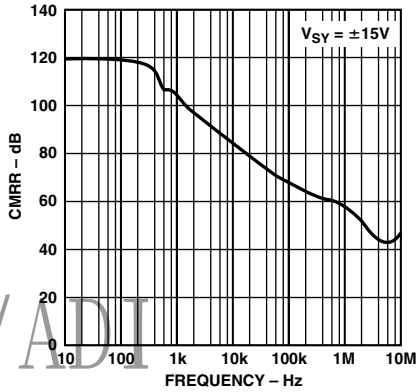

TPC 33. CMRR vs. Frequency

www.BDTIC.com/ADI

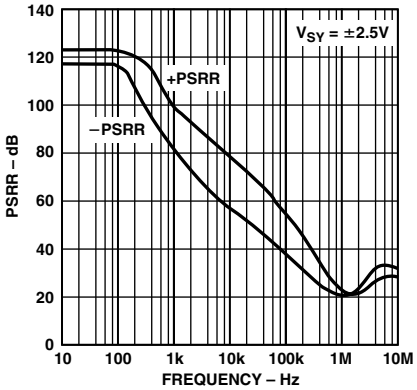

TPC 34. PSRR vs. Frequency

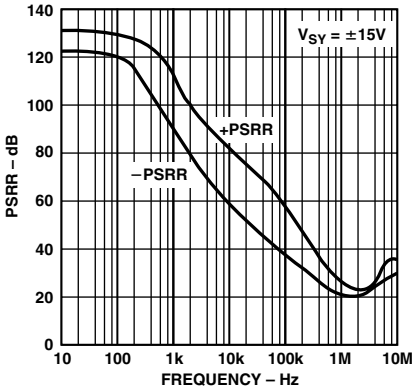

TPC 35. PSRR vs. Frequency

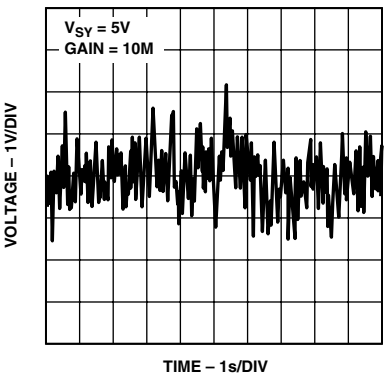

TPC 36. 0.1 Hz to 10 Hz Input Voltage Noise

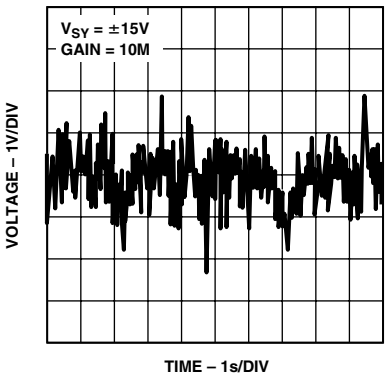

TPC 37. 0.1 Hz to 10 Hz Input Voltage Noise

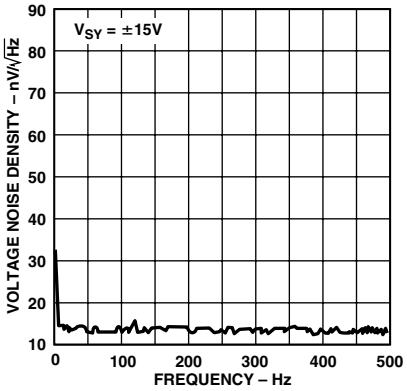

TPC 38. Voltage Noise Density

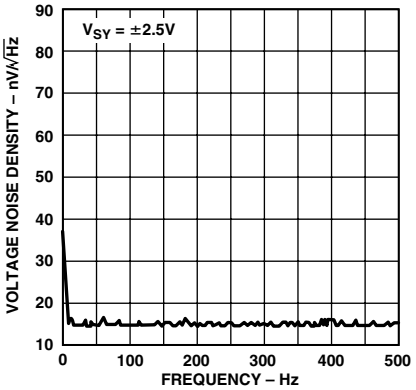

TPC 39. Voltage Noise Density

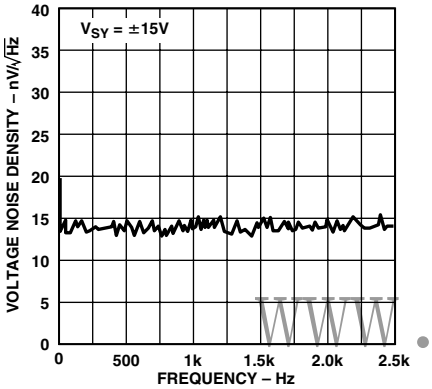

TPC 40. Voltage Noise Density

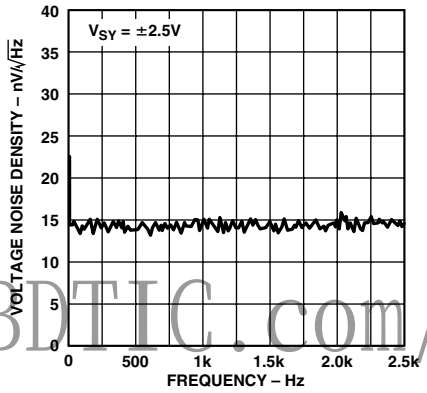

TPC 41. Voltage Noise Density

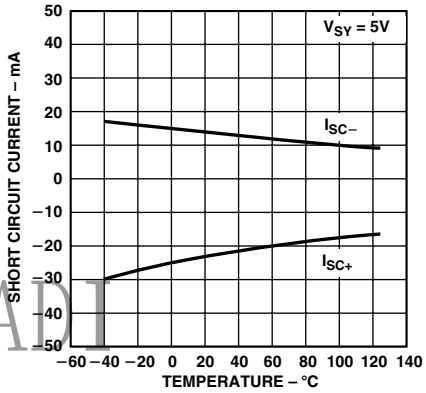

TPC 42. Short Circuit Current vs. Temperature

www.BDTIC.com/ADI

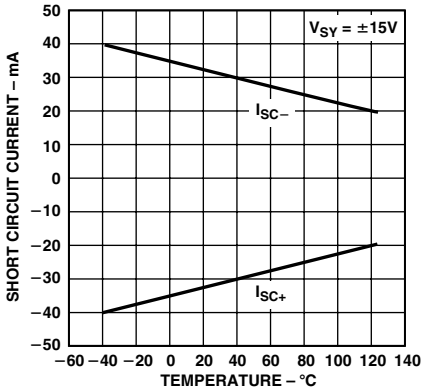

TPC 43. Short Circuit Current vs. Temperature

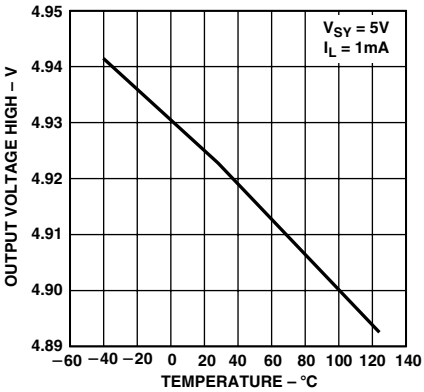

TPC 44. Output Voltage High vs. Temperature

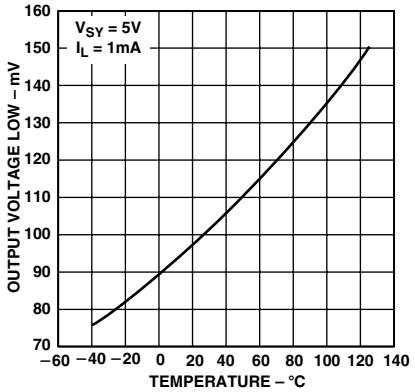

TPC 45. Output Voltage Low vs. Temperature

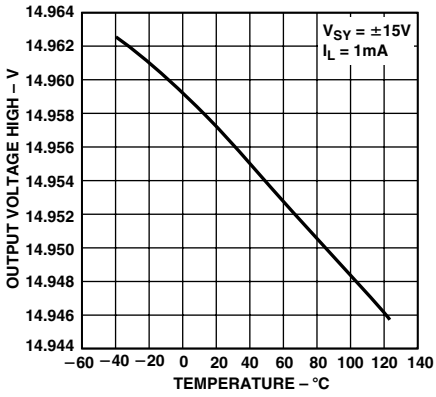

TPC 46. Output Voltage High vs. Temperature

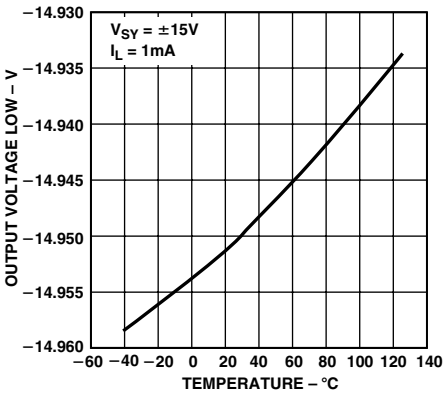

TPC 47. Output Voltage Low vs. Temperature

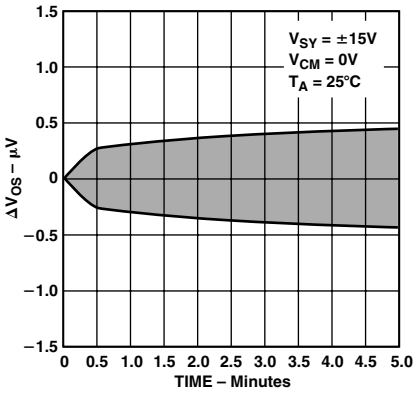

TPC 48. Warm-Up Drift

BASIC OPERATION

The OP777/OP727/OP747 amplifier uses a precision Bipolar PNP input stage coupled with a high-voltage CMOS output stage. This enables this amplifier to feature an input voltage range which includes the negative supply voltage (often ground- in single-supply applications) and also swing to within 1 mV of the output rails. Additionally, the input voltage range extends to within 1 V of the positive supply rail. The epitaxial PNP input structure provides high breakdown voltage, high gain, and an input bias current figure comparable to that obtained with a "Darlington" input stage amplifier but without the drawbacks (i.e., severe penalties for input voltage range, offset, drift and noise). The PNP input structure also greatly lowers the noise and reduces the dc input error terms.

www.DZEIC.com/ADI

Supply Voltage

The amplifiers are fully specified with a single 5 V supply and, due to design and process innovations, can also operate with a supply voltage from 2.7 V up to 30 V. This allows operation from most split supplies used in current industry practice, with the advantage of substantially increased input and output voltage ranges over conventional split-supply amplifiers. The OP777/OP727/OP747 series is specified with (V_{SY} = 5 V, V– = 0 V and V_{CM} = 2.5 V which is most suitable for single-supply application. With PSRR of 130 dB (0.3 µV/V) and CMRR of 110 dB (3 µV/V) offset is minimally affected by power supply or common-mode voltages. Dual supply, ±15 V operation is also fully specified.

Input Common-Mode Voltage Range

The OP777/OP727/OP747 is rated with an input common-mode voltage which extends from the minus supply to within 1 V of the positive supply. However, the amplifier can still operate with input voltages slightly below V_{EE}. In Figure 2, OP777/OP727/OP747 is configured as a difference amplifier with a single supply of 2.7 V and negative dc common-mode voltages applied at the inputs terminals. A 400 mV p-p input is then applied to the noninverting input. It can be seen from the graph below that the output does not show any distortion. Micropower operation is maintained by using large input and feedback resistors.

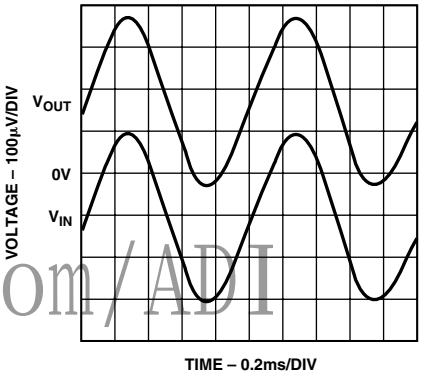

Figure 1. Input and Output Signals with V_{CM} < 0 V

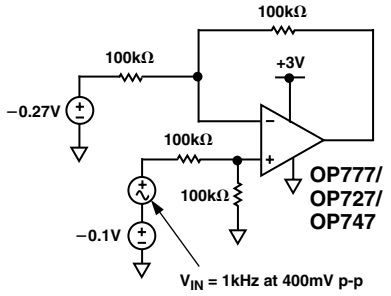

Figure 2. OP777/OP727/OP747 Configured as a Difference Amplifier Operating at V_{CM} < 0 V

Input Over Voltage Protection

When the input of an amplifier is more than a diode drop below V_{EE}, or above V_{CC}, large currents will flow from the substrate (V–) or the positive supply (V+), respectively, to the input pins which can destroy the device. In the case of OP777/OP727/OP747, differential voltages equal to the supply voltage will not cause any problem (see Figure 3). OP777/OP727/OP747 has built-in 500 Ω internal current limiting resistors, in series with the inputs, to minimize the chances of damage. It is a good practice to keep the current flowing into the inputs below 5 mA. In this context it should also be noted that the high breakdown of the input transistors removes the necessity for clamp diodes between the inputs of the amplifier, a feature that is mandatory on many precision op amps. Unfortunately, such clamp diodes greatly interfere with many application circuits such as precision rectifiers and comparators. The OP777/OP727/OP747 series is free from such limitations.



Figure 3a. Unity Gain Follower

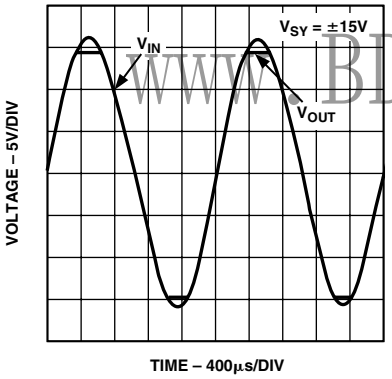

Figure 3b. Input Voltage Can Exceed the Supply Voltage Without Damage

Phase Reversal

Many amplifiers misbehave when one or both of the inputs are forced beyond the input common-mode voltage range. Phase reversal is typified by the transfer function of the amplifier effectively reversing its transfer polarity. In some cases this can cause lockup in servo systems and may cause permanent damage or nonrecoverable parameter shifts to the amplifier. Many amplifiers feature compensation circuitry to combat these effects, but some are only effective for the inverting input. Additionally, many of these schemes only work for a few hundred millivolts or so beyond the supply rails. OP777/OP727/OP747 has a protection circuit against phase reversal when one or both inputs are forced beyond their input common-mode voltage range. It is not recommended that the parts be continuously driven more than 3 V beyond the rails.

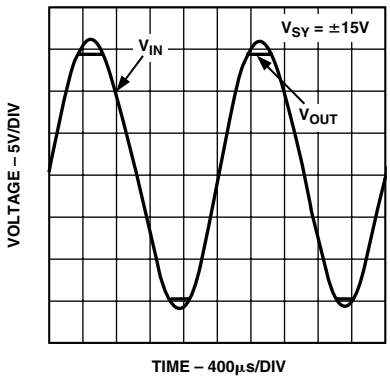

Figure 4. No Phase Reversal

Output Stage

The CMOS output stage has excellent (and fairly symmetric) output drive and with light loads can actually swing to within 1 mV of both supply rails. This is considerably better than similar amplifiers featuring (so-called) rail-to-rail bipolar output stages. OP777/OP727/OP747 is stable in the voltage follower configuration and responds to signals as low as 1 mV above ground in single supply operation.

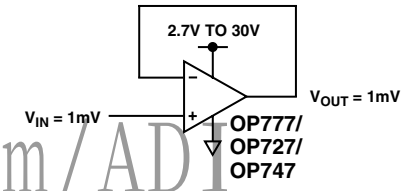

Figure 5. Follower Circuit

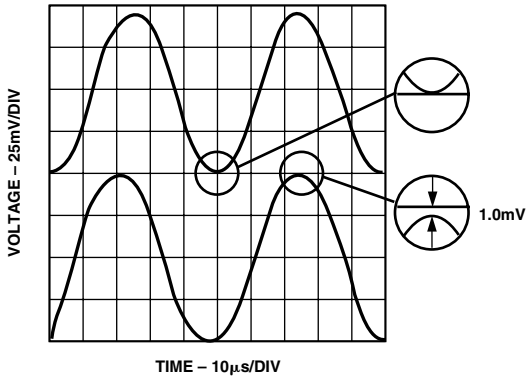

Figure 6. Rail-to-Rail Operation

Output Short Circuit

The output of the OP777/OP727/OP747 series amplifier is protected from damage against accidental shorts to either supply voltage, provided that the maximum die temperature is not exceeded on a long-term basis (see Absolute Maximum Rating section). Current of up to 30 mA does not cause any damage.

A Low-Side Current Monitor

In the design of power supply control circuits, a great deal of design effort is focused on ensuring a pass transistor's long-term reliability over a wide range of load current conditions. As a result, monitoring

www.BDTIC.com/ADI

and limiting device power dissipation is of prime importance in these designs. Figure 7 shows an example of 5 V, single-supply current monitor that can be incorporated into the design of a voltage regulator with foldback current limiting or a high current power supply with crowbar protection. The design capitalizes on the OP777's common-mode range that extends to ground. Current is monitored in the power supply return where a 0.1 Ω shunt resistor, R_{SENSE}, creates a very small voltage drop. The voltage at the inverting terminal becomes equal to the voltage at the noninverting terminal through the feedback of Q1, which is a 2N2222 or equivalent NPN transistor. This makes the voltage drop across R1 equal to the voltage drop across R_{SENSE}. Therefore, the current through Q1 becomes directly proportional to the current through R_{SENSE}, and the output voltage is given by:

$$V_{OUT} = 5\ V - \left(\frac{R2}{R1} \times R_{SENSE} \times I_L\right)$$

The voltage drop across *R2* increases with I_L increasing, so V_{OUT} decreases with higher supply current being sensed. For the element values shown, the V_{OUT} is 2.5 V for return current of 1 A.

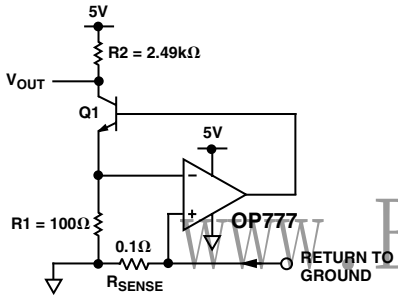

Figure 7. A Low-Side Load Current Monitor

The OP777/OP727/OP747 is very useful in many bridge applications. Figure 8 shows a single-supply bridge circuit in which its output is linearly proportional to the fractional deviation (δ) of the bridge. Note that δ = ΔR/R.

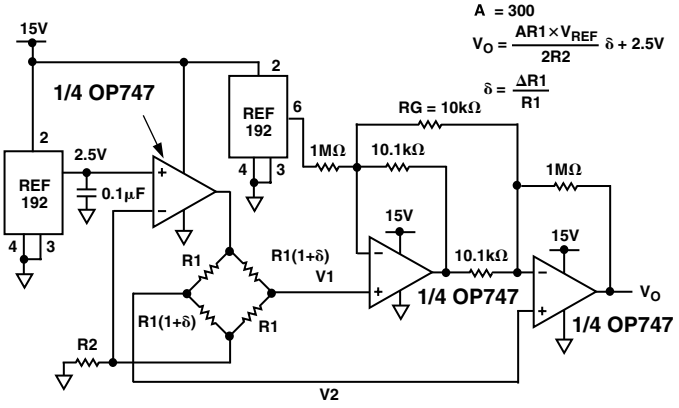

Figure 8. Linear Response Bridge, Single Supply

In systems where dual supplies are available, the circuit of Figure 9 could be used to detect bridge outputs that are linearly related to the fractional deviation of the bridge.

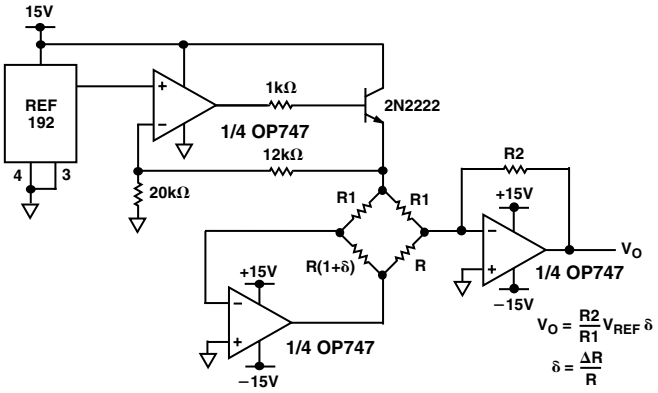

Figure 9. Linear Response Bridge

A single-supply current source is shown in Figure 10. Large resistors are used to maintain micropower operation. Output current can be adjusted by changing the R2B resistor. Compliance voltage is:

$$\left| V_L \right| \leq \left| V_{SAT} \right| - \left| V_S \right|$$

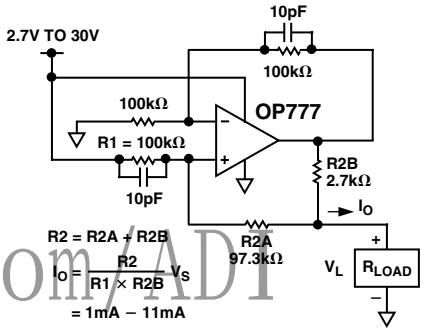

Figure 10. Single-Supply Current Source

A single-supply instrumentation amplifier using one OP727 amplifier is shown in Figure 11. For true difference R3/R4 = R1/R2. The formula for the CMRR of the circuit at dc is CMRR = 20 × log (100/(1–(R2 × R3)/(R1× R4)). It is common to specify the accuracy of the resistor network in terms of resistor-to-resistor percentage mismatch. We can rewrite the CMRR equation to reflect this CMRR = 20 ×log (10000/% Mismatch). The key to high CMRR is a network of resistors that are well matched from the perspective of both resistive ratio and relative drift. It should be noted that the absolute value of the resistors and their absolute drift are of no consequence. Matching is the key. CMRR is 100 dB with 0.1% mismatched resistor network. To maximize CMRR, one of the resistors such as R4 should be trimmed. Tighter matching of two op amps in one package (OP727) offers a significant boost in performance over the triple op amp configuration.

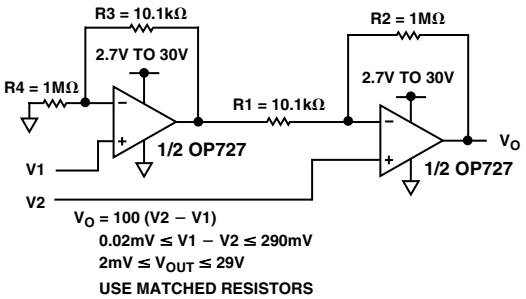

Figure 11. Single-Supply Micropower Instrumentation Amplifier

www.BDTIC.com/ADI

OUTLINE DIMENSIONS

Dimensions shown in inches and (mm).

8-Lead MSOP
(RM-8)

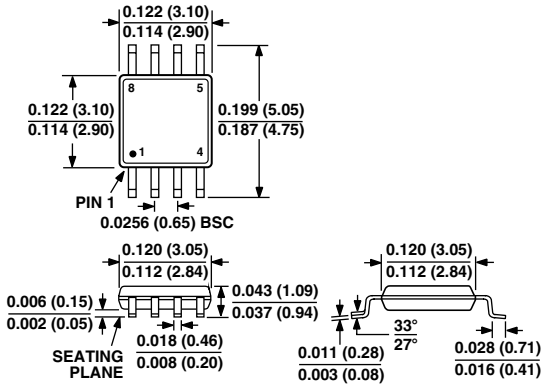

8-Lead SOIC
(R-8)

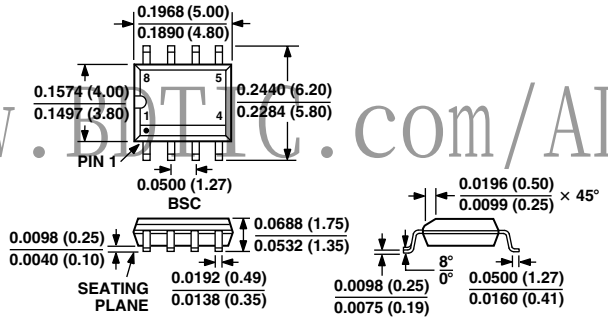

www.DataSheet4U.com/ADI

8-Lead TSSOP
(RU-8)

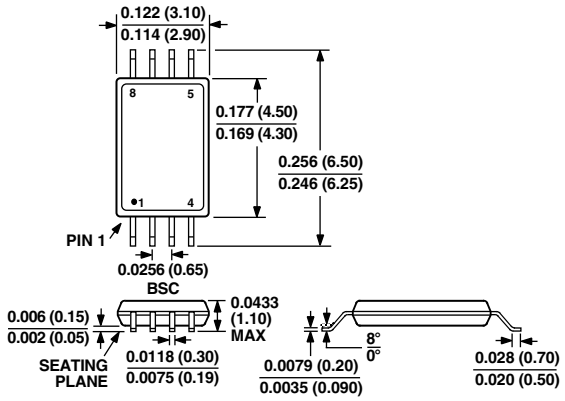

14-Lead SOIC
(R-14)

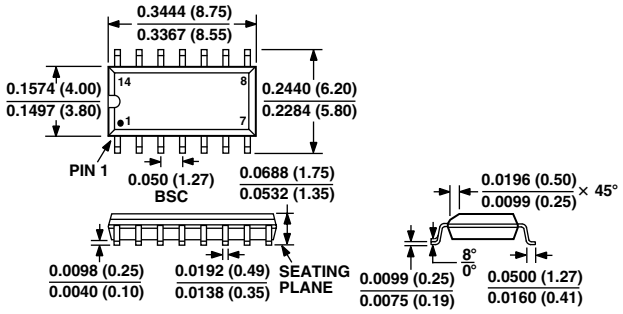

14-Lead TSSOP
(RU-14)

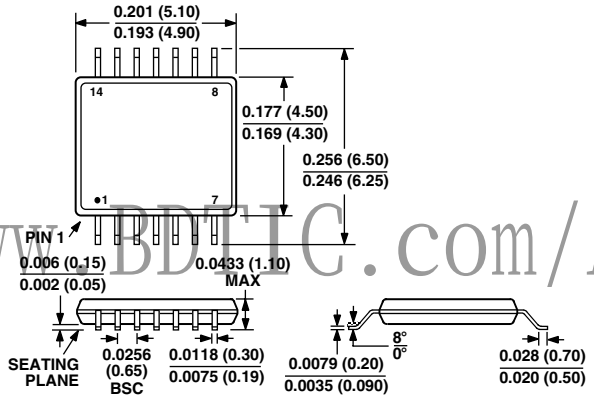

www.BDTIC.com/ADI

Revision History

Location	Page
Data Sheet changed from REV. B to REV. C.	
Addition of text to APPLICATIONS section	1
Addition of 8-Lead SOIC (R-8) package	1
Addition of text to GENERAL DESCRIPTION	1
Addition of package to ORDERING GUIDE	2

www.BDTIC.com/ADI

CO2051–0–9/01(C)

www.BDTIC.com/ADI

PRINTED IN U.S.A.